


Customer approval :

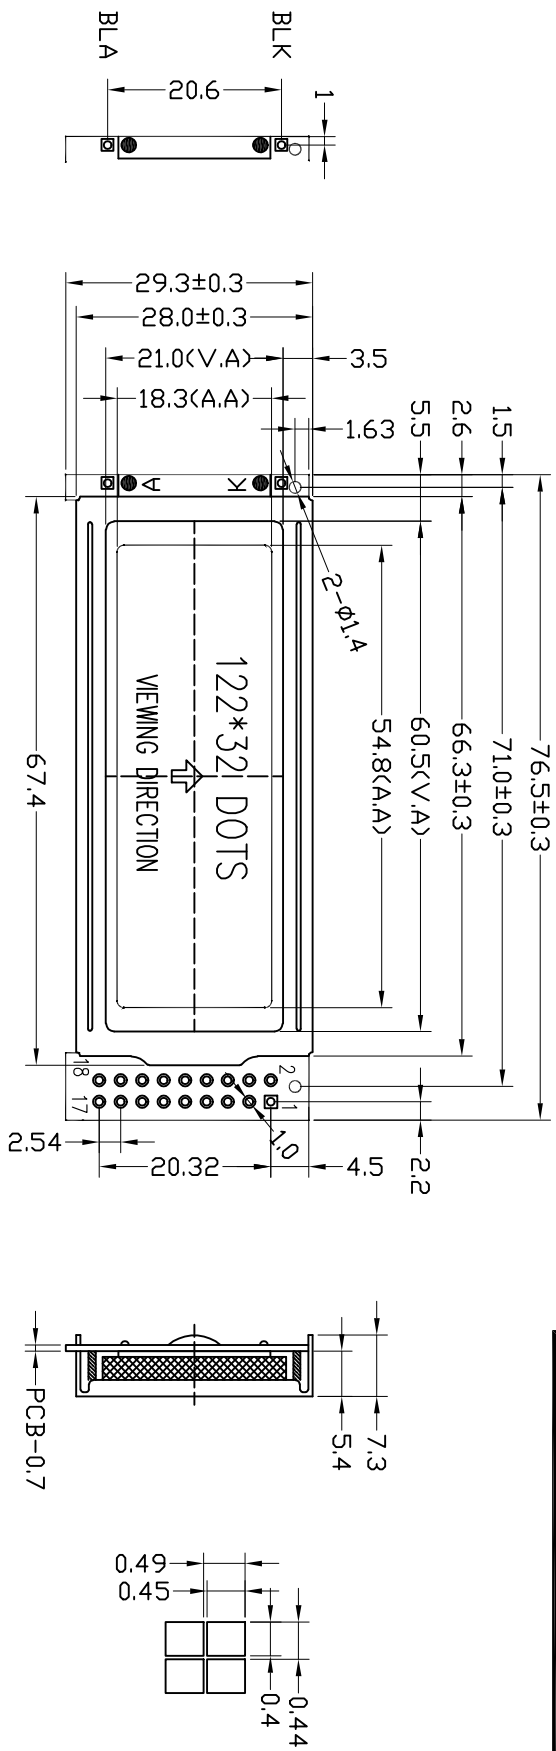

1	2	3	4	5	6	7	8	9	~	16	17	18
VDD	VSS	V0	RST	E1	E2	R/W	RS	DB0	~	DB7	BLK	BLA

- SPECIFICATION:**
- 1). Driving: DUTY:1/32, BIAS:1/6, VO: 4.7V, VDD:5.0V
 - 2). Viewing angle: 6.0°CLOCK
 - 3). Display mode: STN(YELLOW-GREEN),POSITIVE,TRANSFLECTIVE
 - 4). Operating temp: 0°C~+50°C
 - 5). Storage temp: -10°C~+60°C
 - 6). Controller IC: SED1520 (or compatible)
 - 7). Backlight: Edge(YELLOW-GREEN),LED BLA-BLK=5.0V
 - 8). Dimensions with mark "*" are important, with mark "(")" are referenced
 - 9). All the raw materials are RoHS complicant

REV	REVISION RECORD	REV	MODEL NO.	CHECKED BY	DRAWING BY	GENERAL TOL:
A	First issue	A0	SYB12232EV11-5C13YL3	Francis	Lan	± 0.3
B			模组型号	检查	绘图	公差
C			APPROVED BY			UNIT: mm
D			Liu	2012/12/05	2012/12/05	PROJECTION 三角法

TCC 深圳市三元晶科技有限公司
ShenZhen TCC Tech Co., Ltd.