


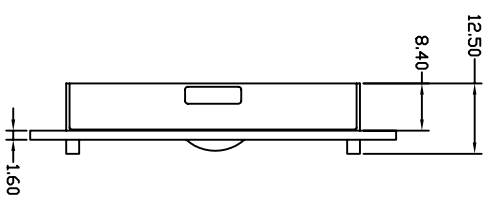


**Customer approval :**

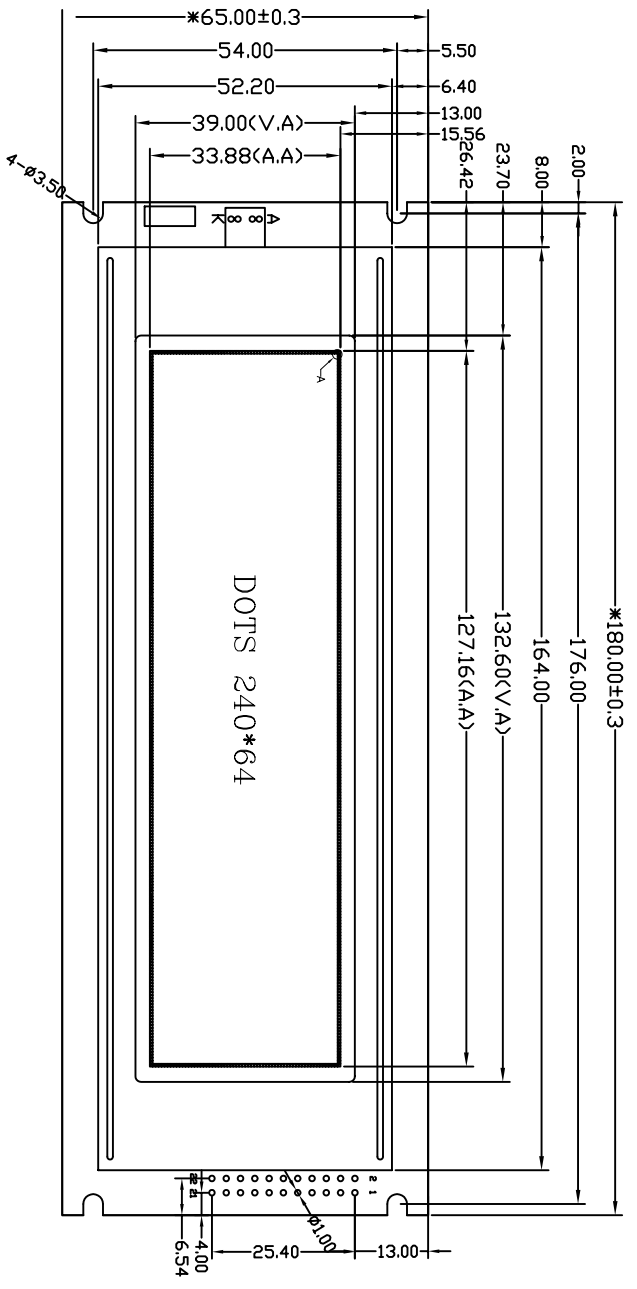

PIN	1	2	3	4	5	6	7	8	9	10	11
CONNECTION	GND	VDD	V0	RS	R/W	E	DB0	DB1	DB2	DB3	DB4
PIN	12	13	14	15	16	17	18	19	20	21	22
CONNECTION	DB5	DB6	DB7	CS	RES	VOUT	FG	BLA	BLK	BLA	BLK

**Specification:**

- 1). Driving: Dots:240\*64, Duty:1/64, Bias:1/9,VDD:5.0V,VOUT:-1.5.5V,VO:-1.2.0V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:STN/NEGATIVE(BLUE)/TRANSMISSIVE
- 4). Operating temp.: -20°C~+70°C  
Storage temp.: -30°C~+80°C
- 5). Controller IC:L7981
- 6). Backlight: Bottom ,White
- 7). Dimensions with mark "\*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compliant

<b>REVISION RECORD</b>		<b>REV</b>	<b>深圳市三元鼎科技有限公司</b> ShenZhen TCC LCD Hi-Tech Co., Ltd.			
First issue		A0				
<b>DRAWING NO.</b>	<b>SYB24064AV10</b>	<b>GENERAL TOL:</b>	<b>±0.3</b>			
<b>APPROVED BY</b>	<b>CHECKED BY</b>	<b>DRAWING BY</b>	<b>UNIT:</b>	<b>mm</b>	<b>PAGE</b>	<b>1/1</b>
		<b>LAN</b>				
		<b>2013/03/25</b>				