



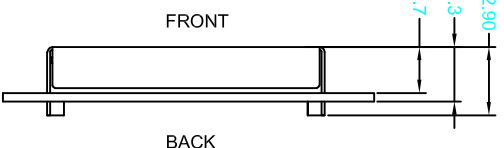


Customer approval :

并口parallel

PIN	SYMBOL
1	VSS
2	VDD(3.3V)
3	NC
4	RS
5	WR
6	RD
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	/CS
16	NC
17	/RES
18	NC
19	BLA
20	BLK

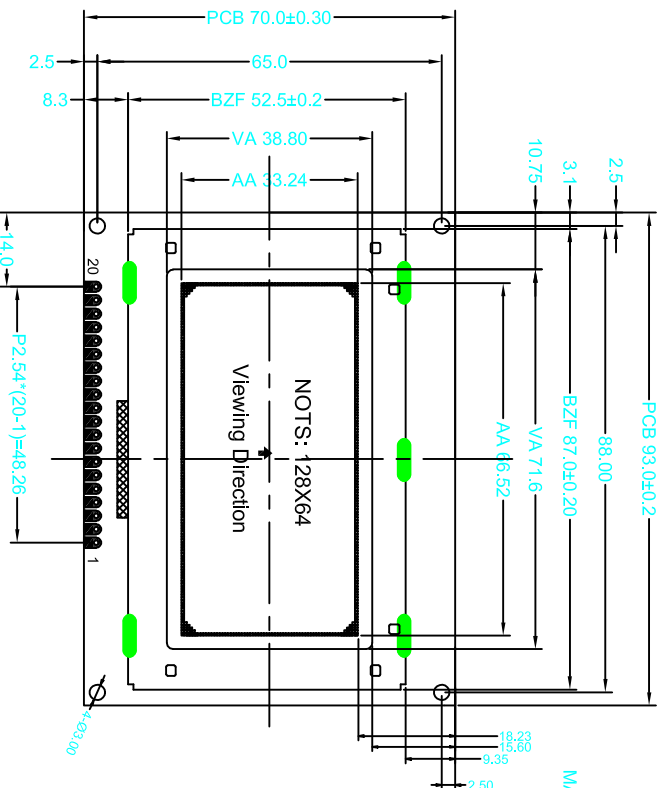

- Specifications:
1. Display Mode: STN/Blue/Transmissive/Negative
 2. Viewing Angle: 6.0'clock.
 3. Drive Method: 1/65 Duty 1/9 Bias, VOP=9.0V, VDD=3.3V.
 4. Top: 0°C~+50°C, Tst: -10°C~+60°C.
 5. Drive IC: ST7565R
 6. Backlight Color: White /3.0V,3*45mA
 7. RoHS Compliant: Yes.

REV	REVISION RECORD	DATE	深圳市三元晶科技有限公司 ShenZhen TCCLCD Hi-Tech Co., Ltd.			
A	FIRST ISSUE	2015/11/03	MODEL NO.	SYG12864CV10-5C338LUN2-B5W1	GENERAL TOL:	± 0.3
B			模组型号		PAGE:	未注公差
C			APPROVED BY	审核	DRAWING BY	页面 1 OF 1
D			Liu	Francis	Luoxian	PROJECTION
			2015/11/03	2015/11/03	2015/11/03	三角法

