
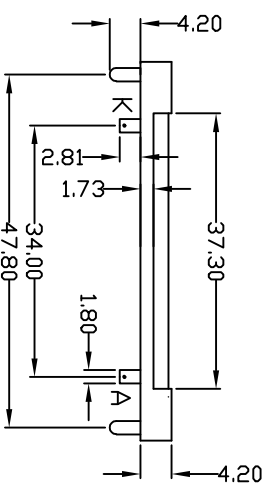
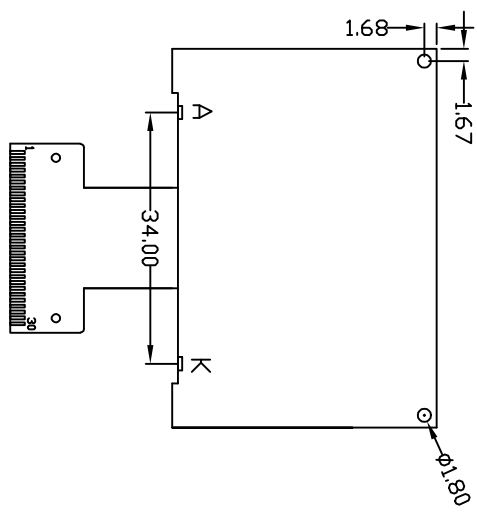
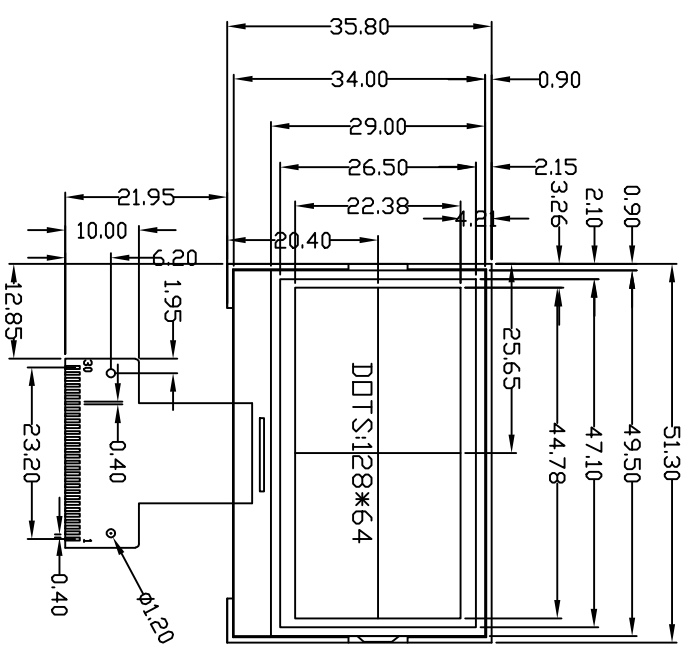


Customer approval :

1	CS
2	RST
3	A0
4	WR
5	RD
6	D0
7	D1
8	D2
9	D3
10	D4
11	D5
12	D6
13	D7
14	VDD
15	VSS
16	VOUT
17	CAP3P
18	CAP1N
19	CAP1P
20	CAP2P
21	CAP2N
22	V4
23	V3
24	V2
25	V1
26	V0
27	C86
28	PSB
29	NC
30	NC

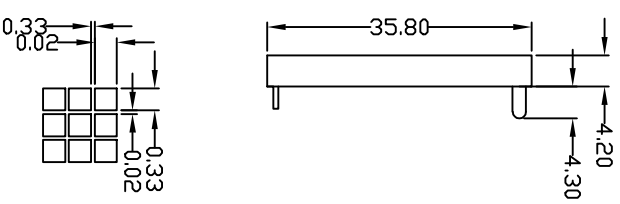

Specification:

- 1). Driving: Duty: 1/4. Bias: 1/2. LCD: 9V;
- 2). Viewing Direction: 6 O'clock
- 3). Display mode: FSTN/Positive/Transflective
- 4). Operating temp.: -20°C~+70°C  
Storage temp.: -30°C~+80°C
- 5). IC: ST7565R
- 6). Backlight: Whitet

REV	REVISION RECORD	DATE
A0	First issue	7/14


**深圳市三元晶科技有限公司**  
 ShenZhen TCC LCD Hi-Tech Co., Ltd.

MODEL NO. SYG12864S010-3C33F3L GENERAL TOL: ± 0.3

APPROVED BY CHECKED BY DRAWING BY Jequill UNIT: mm

PROJECTION

