

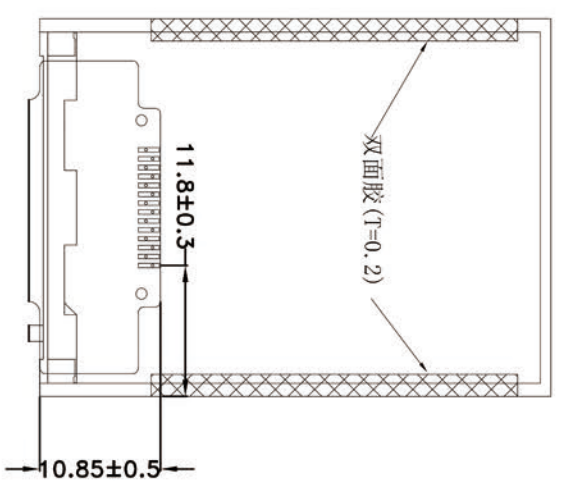
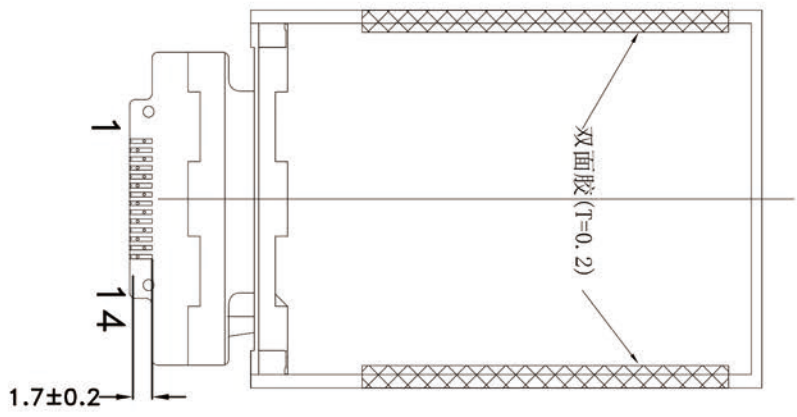


REV	DC/EC NUMBER	DESCRIPTION	DATE

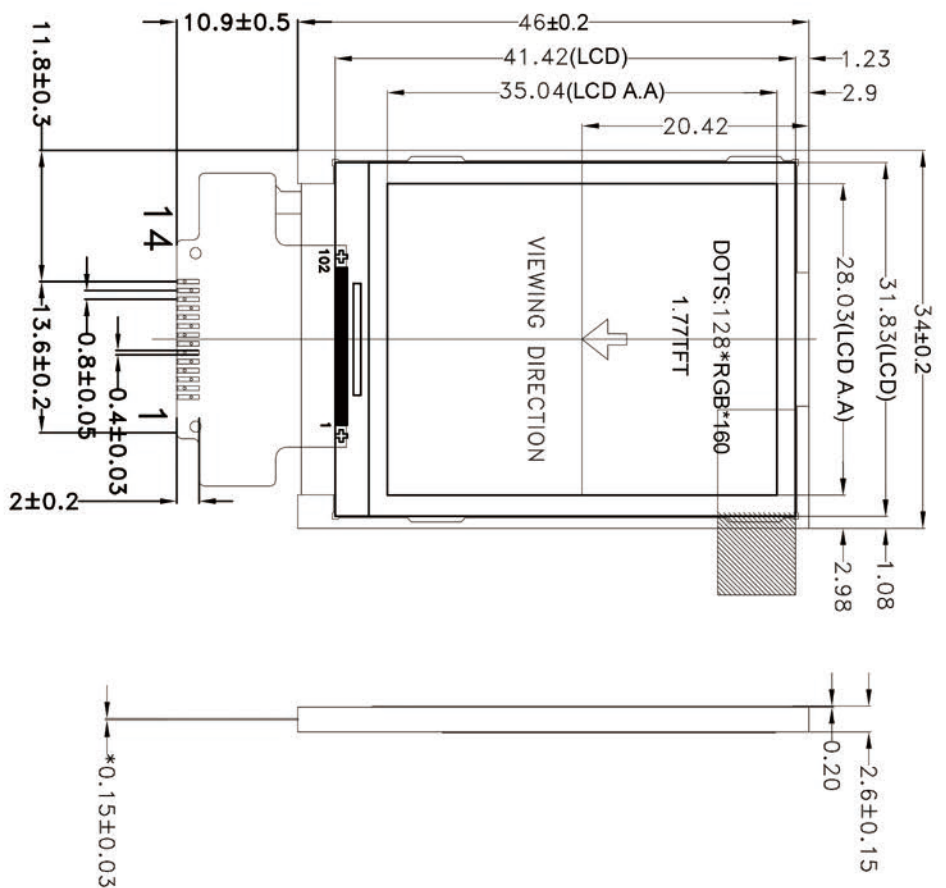

PIN	DESCRIPTION
1	NC
2	GND
3	LED-K
4	LED-A
5	GND
6	/RESET
7	AO
8	SDA
9	SCL
10	VCC
11	IOVCC
12	CS
13	GND
14	NC

CIRCUIT DIAGRAM



DIMENSION	LEVEL	1	2	3	SELECT LEVEL
0 ~ 4		0.05	0.2	0.2	0.2
4 ~ 14		0.1	0.2	0.2	0.2
14 ~ 63		0.1	0.2	0.4	0.4
63 ~ 250		0.2	0.4	0.8	0.8
250 ~ 600		0.2	0.4	1.0	1.0
600 ~ 4000		0.6	1.0	1.6	1.6

GENERAL ANGULAR TOLERANCE	LEVEL	1	2	3	SELECT LEVEL
RANGE		1°	2°	3°	2°

- NOTES:
- 1.DISPLAY TYPE: 262K COLOR TFT-LCD, TRANSMISSIVE, NORMAL WHITE
 - 2.OPERATING TEMP: -10°C~60°C
 - 3.STORAGE TEMP: -20°C~70°C
 - 4.LCD DRIVER: ST7735R
 - 5.VIEWING DIRECTION: 12 O'CLOCK
 - 6.Backlight: white LED 2 CHIP
 - 7.GENERAL TOLERANCE: ±0.2

CRITICAL DIMENSION	SPEC DIMENSION	UNIT	SCALE	3rd ANGLE	MODEL NAME
APPROVED		mm	1.000		SYC177PQQ003SH
CHECKED					SYC177PQQ003SH
DESIGNED					Module